


SuperPort Output Card Pinout

PIN ASSIGNMENTS FOR DIG-726, DIG-726TTL, DIG-726TTL-G

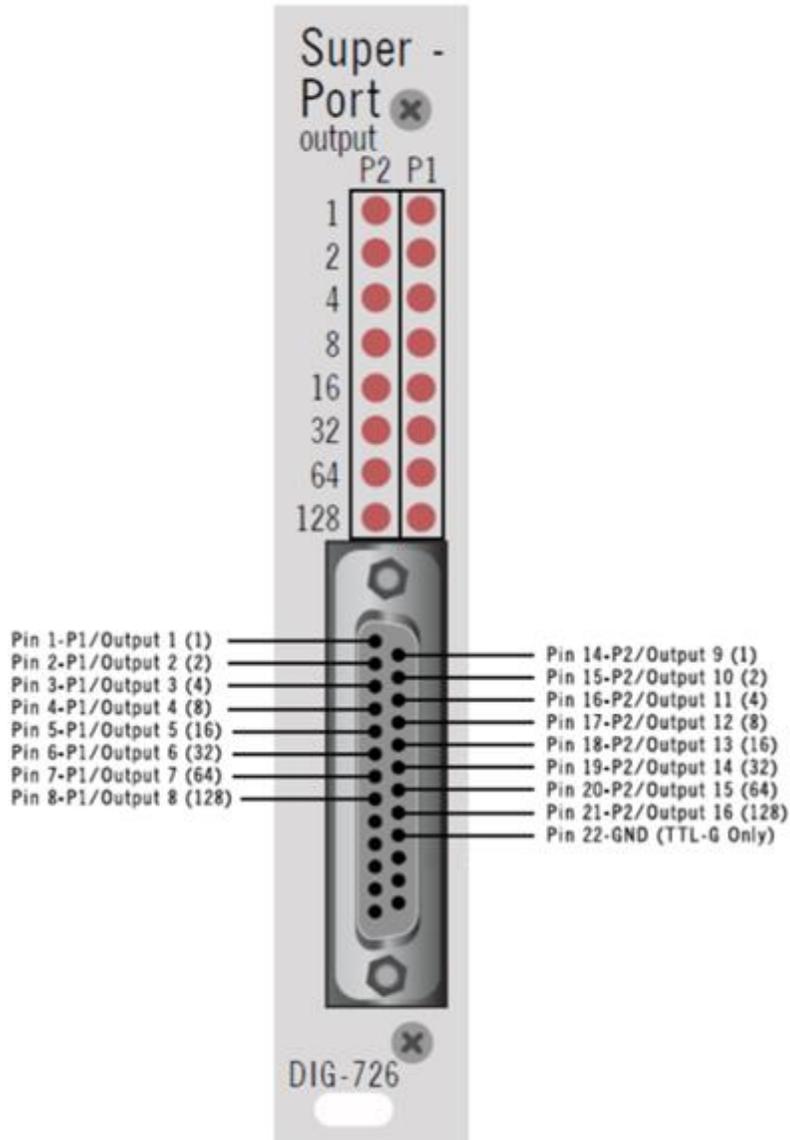

NOTES

1. DIG-726TTL can be converted to DIG-726TTL-G by connecting Pin 22 or Pin 23 to digital ground on the PCB. Please email support@med-associates.com or call (802) 527-2343 for details.
2. The outputs are optically isolated on the DIG-726 (28V).
3. The outputs are NOT optically isolated on the DIG-726TTL (5V).